


CEILING MOUNTED WORK AREA CRANES

20', 25' & 30' SUPPORT CENTERS

Truss Track Configuration

- * Ceiling Mounted Work Area Bridge Crane Systems:
- * Steel: Maximum hanger centers Plain Track (SD) = 6'-0"
Steel: Maximum hanger centers Trussed Track (SD) = 20'-0, 25'-0, or 30'-0
- * Systems include:
 - > Bridge
 - > Splice Assemblies
 - > Festoon Stack-up Section
 - > End Trucks
 - > Festoon Cable Trolleys
 - > Hanger Assemblies
 - > Hoist-Trolley
 - > 4-Cond #14 Flat Cable
 - > Runways
 - > Festoon Clamps
- * Sway Bracing (by others) is required on all systems for lateral stability.
Systems meet all Seismic Zone 4 requirements.

* Part Number Explanation:

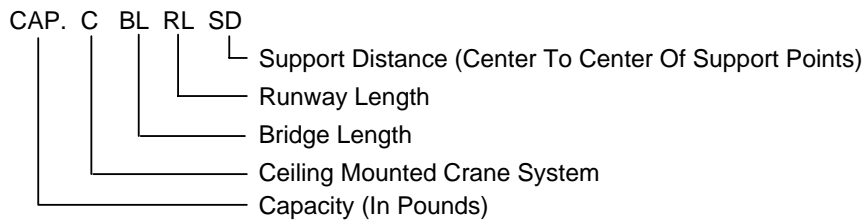

Truss Track

